

Low-floor tram *VarioLF2 plus*

The KOMFORT plus bogie

Conception


- fully pivoted bogie
- primary and secondary suspension
- wheels \varnothing 700 mm
- inheritance of elements
- electromechanical brakes

Characteristic

- minimizing of the negative effects on the railroad track
- reducing of the wheel and rail top wastage
- high limit of the kilometrical overspeed into the reprofilation
- low internal and external noisiness of the tram
- high quality number of the operation W_2
- high level of safety against the derailment

Effects

- optimization of direct and indirect operating costs
- fulfilling of the hygienic requirements for operation
- Ensuring the safety and comfort of travel

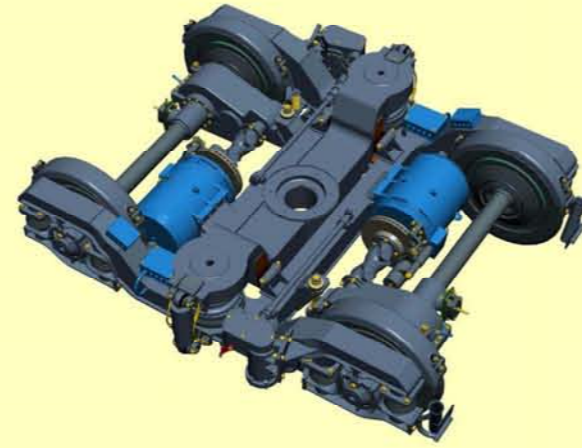

*reasonable
choice*




VarioLF2 plus


PRAGOIMEX a.s.
Pod náspem 795/12
P.O.B. 1
190 05 Praha 9 – Czech Republic
E-mail: info@pragoimex.cz
<http://www.pragoimex.cz>

Aliance
Pragoimex[®]
KRNOVSKÉ OPRAVNÝ
A STROJIRNY
WKV Praha
s. r. o.


M: VarioLF plus

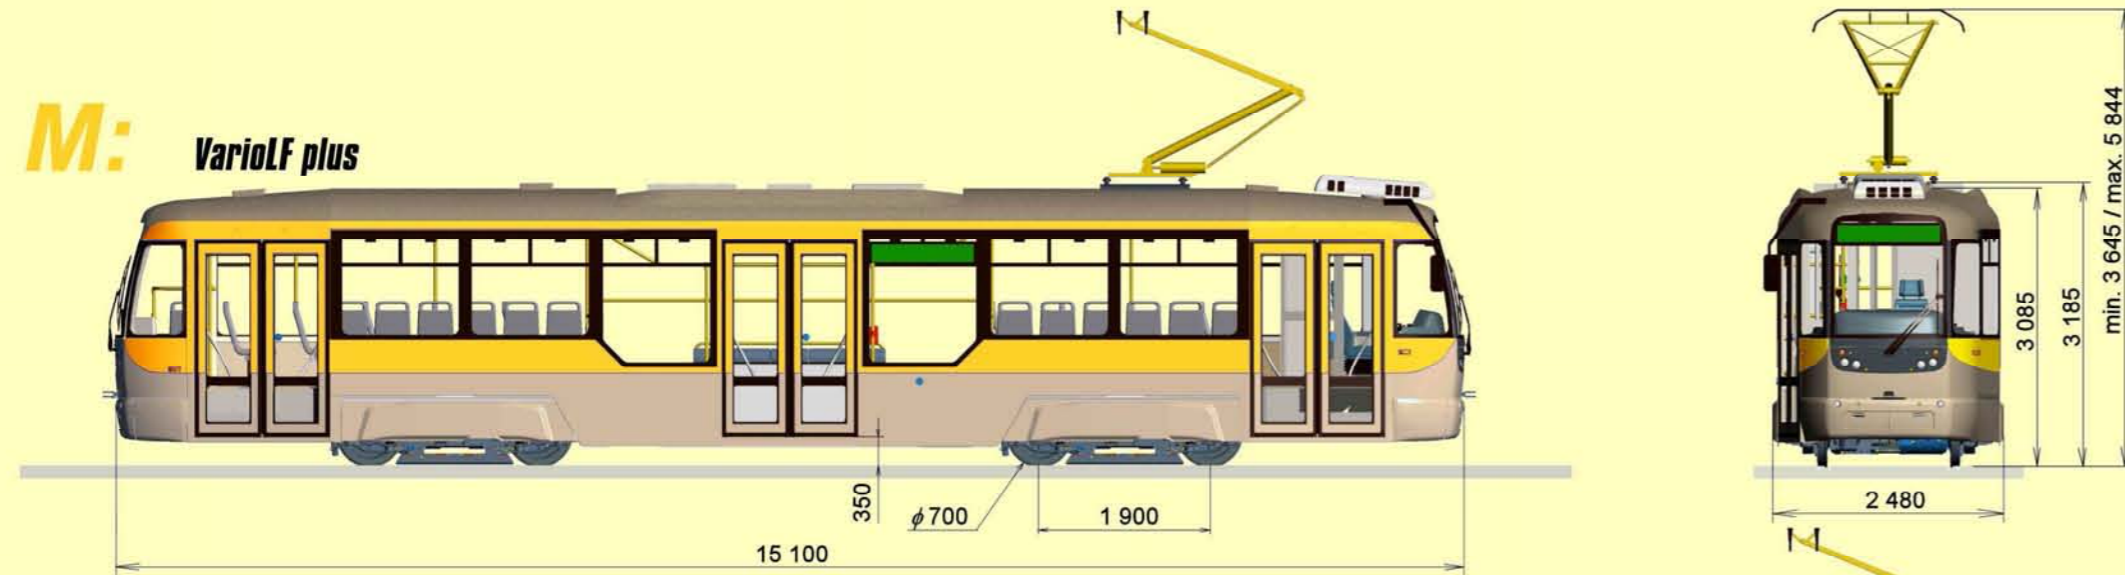


L: VarioLF2 plus

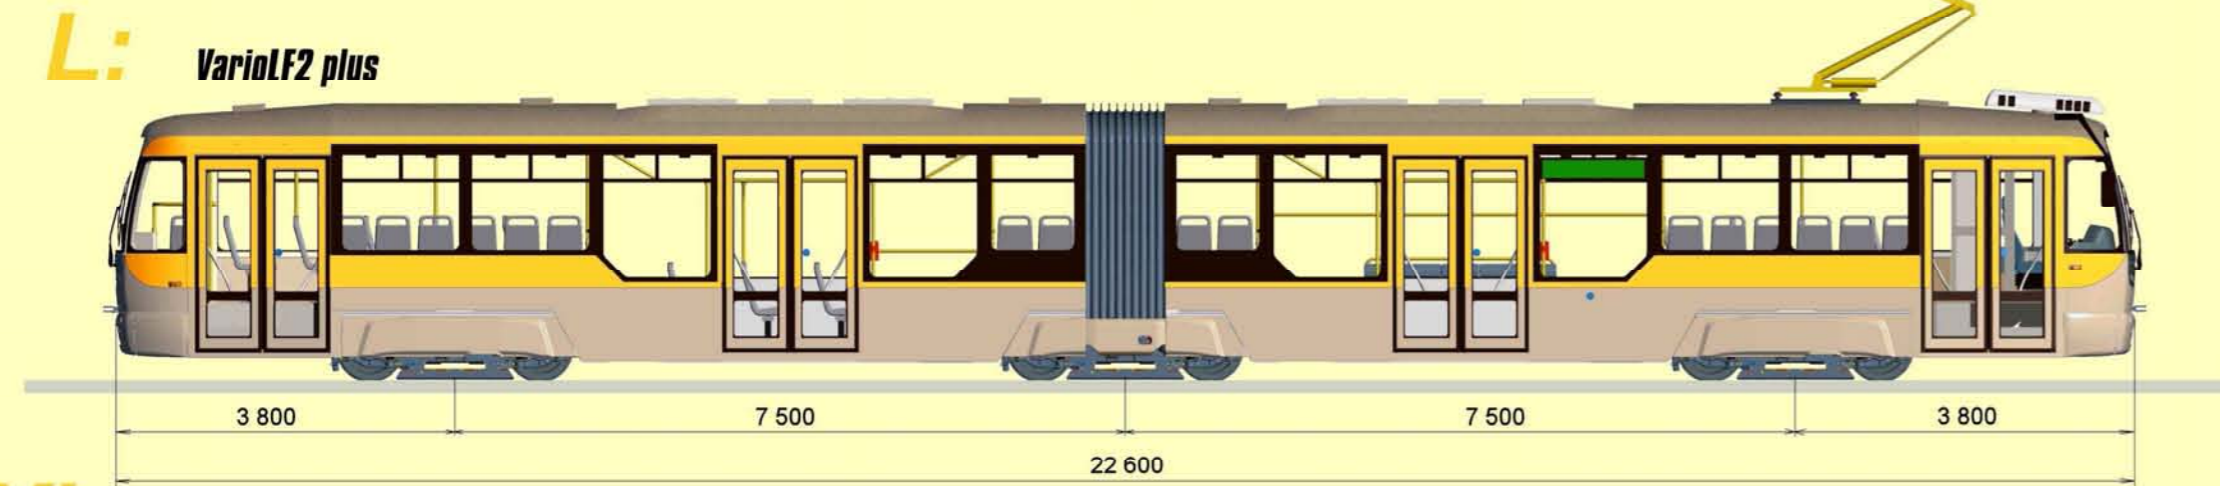

XL: VarioLF3 plus

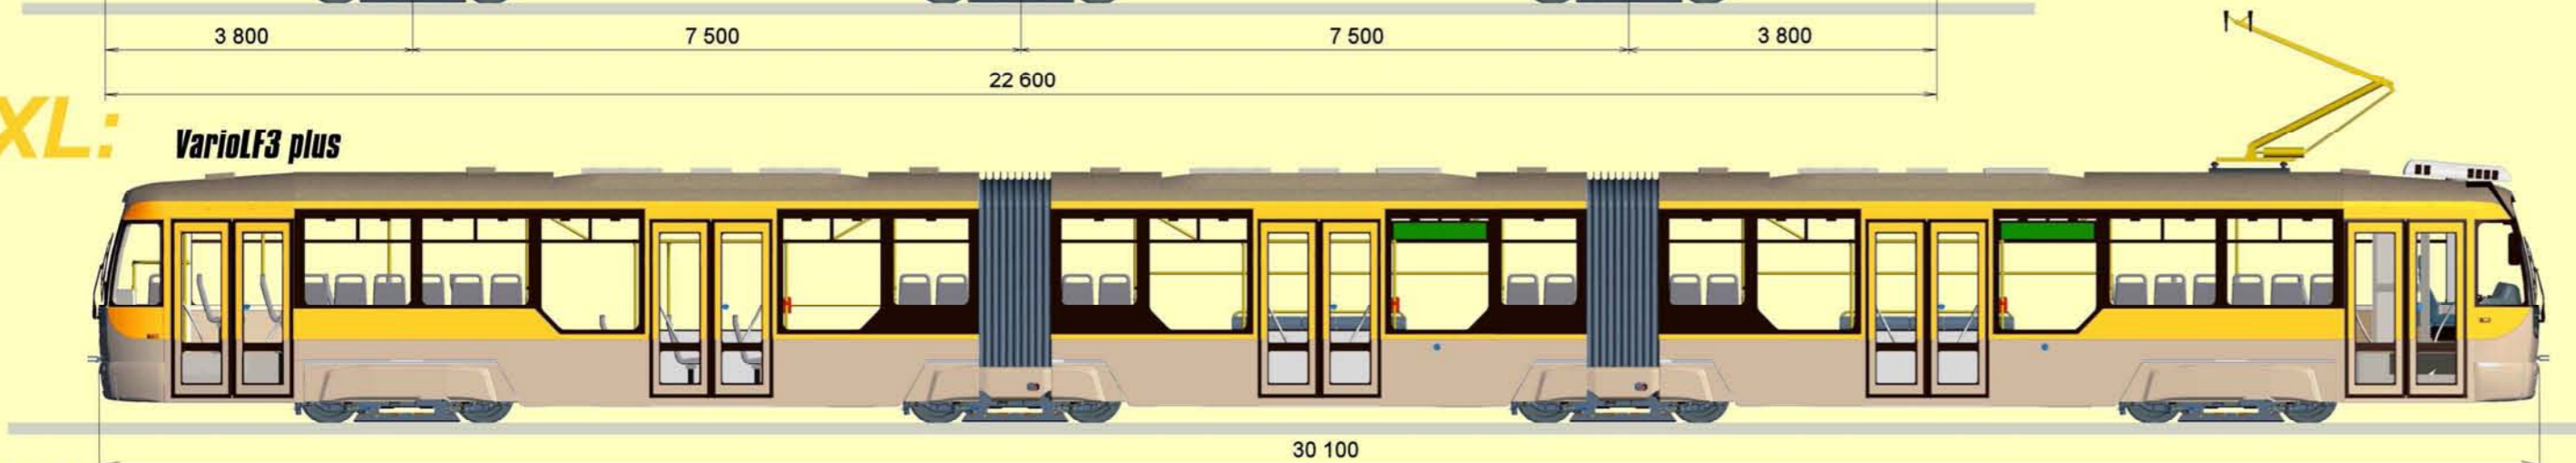

XXL: VarioLF4 plus

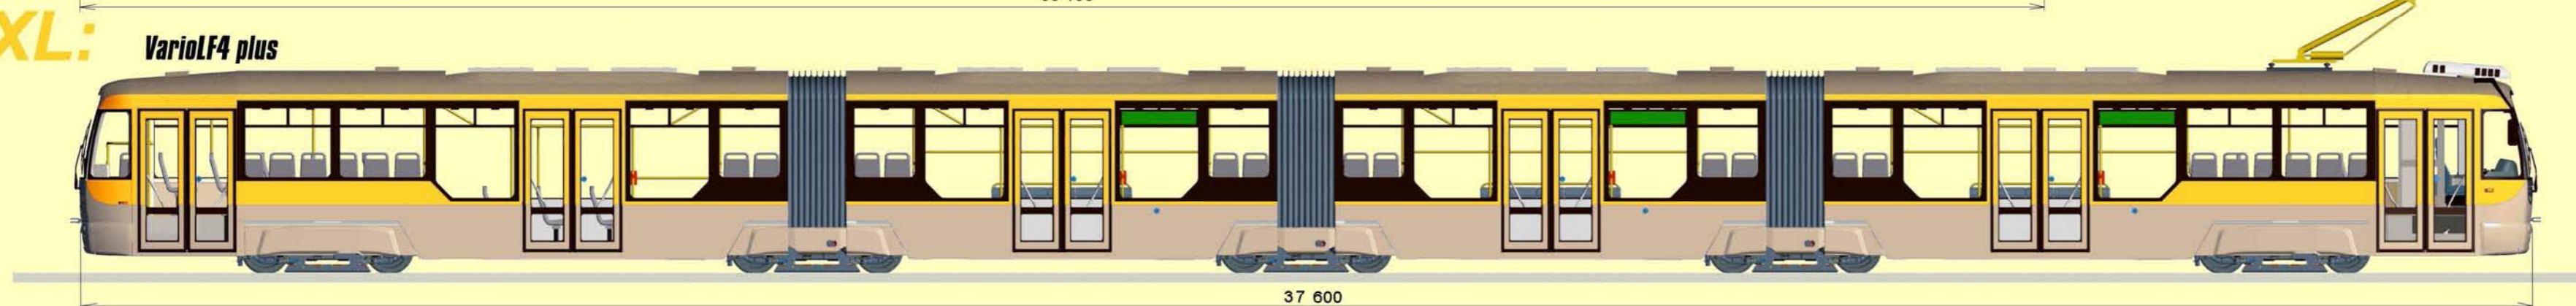

more options

more comfort

more savings

more variability

more unification

Specification

	VarioLF ⁺	VarioLF2 ⁺	VarioLF3 ⁺	VarioLF4 ⁺
gauge (mm)	1 435/1 524	1 435/1 524	1 435/1 524	1 435/1 524
number of sections (pcs)	1	2	3	4
length of tram (mm)	15 100	22 600	30 100	37 600
maximum width of vehicle (mm)	2 480	2 480	2 480	2 480
number of driven pivoted bogies (pcs)	2	3	4	4
number of non-driven pivoted bogies (pcs)	0	0	0	1
bogie type	Bo'Bo'	Bo'Bo'Bo'	Bo'Bo'Bo'Bo'	Bo'Bo'2'Bo'Bo'
max/min wheel diameter (mm)	700/590	700/590	700/590	700/590
min. curve radius (m)	18	18	18	18
floor of vehicles above the track (mm)	350/650	350/650	350/650	350/650
share of low floor (%)	36	43	50	61
number of doors (pcs)	3	4	5	6
seatings (pcs)	32	50+2 fold-down seats	61	82
number of standing pass. (8 pass/m ²)	116	182	250	308
max.occupancy	144	232+2 fold-down seats	311	390
weight of empty car (kg)	21 200	30 000	41 650	50 550
weight by max. occupancy (8 pass./m ²) (kg)	31 560	46 240	63 420	77 850
axle load (8 pers./m ²) (kg)	7 950	7 800	7 950	7 950
traction tension (V)	600/750	600/750	600/750	600/750
transfer of traction power	AC	AC	AC	AC
brake control	electromechanic			
installed motor output (kW)	4 x 80	6 x 80	8 x 80	8 x 80
traction motors	Closed air-cooled of type TAM 1003 C/R			
max. speed (km/hr)	65	65	65	65

Let's go on...